

208~230V 4-Way Cassette





Model:GMV-ND12T/A-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND12T/A-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	12
Rated Heating Capacity	kBtu/h	13.5
Sound Pressure Level	dB(A)	32/35/37
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
Fan		
Type x Quantity	—	Centrifugal×1
Air Flow Volume	CFM	440/530/590
Fan Motor Running Current	A	0.5
Fan Motor Power Output	W	45
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ12.7/Φ1/2
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	240×840×840/ (9-1/2×33×33)
Net Weight	kg/lbs	26.5/58
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND12T/A-T(U).

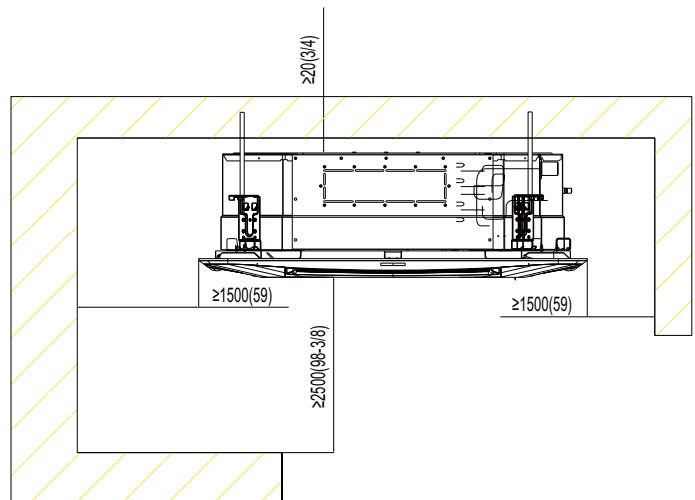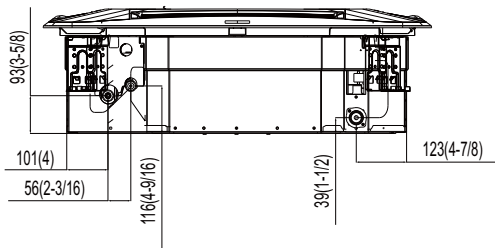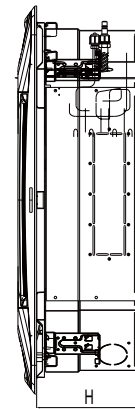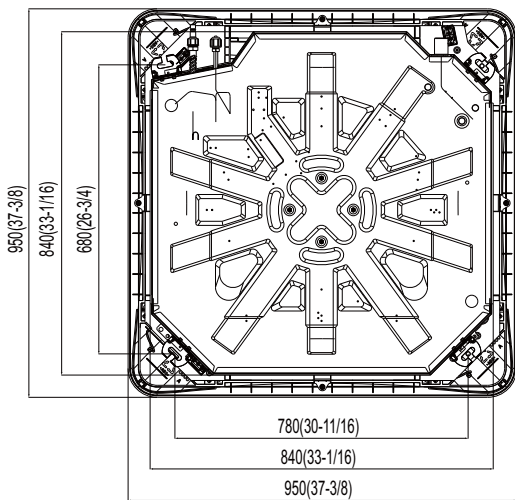

model	H
GMV-ND12T/A-T(U)	260(10-1/4)

Unit:mm(in.)

